

EXCELLENS T

LINE SET COVER

- Stiff, shockproof, anti-UV and recyclable plastic material
- Rounded bottom and lid
- Clip-together central fastening
- Pre-punched slots in bottom for wall mounting
- Length 78 3/4"
- Paintable
- Operating temperature -68°F / +167°F




MODEL	MIN. QUANTITY	TOP LINE CODE	BROWN LINE CODE	DIMENSIONS [in]	
				A	B
T 72 - EXC	8 PCS = 629 7/8"	11120072	SCD100617	2 7/8	2 1/2

EXCELLENS TB

LINE SET COVER

- Stiff, shockproof, anti-UVA and recyclable plastic material
- Rounded bottom and lid
- Clip-together central fastening
- Pre-punched slots in bottom for wall mounting
- Four-way sliding spirit level supplied on each 78 3/4" bar
- Prepared for insertion of the mini pumps Easy Flow, Easy One, Aqua Split
- Length 78 3/4"
- Paintable
- Operating temperature -68°F / +167°F

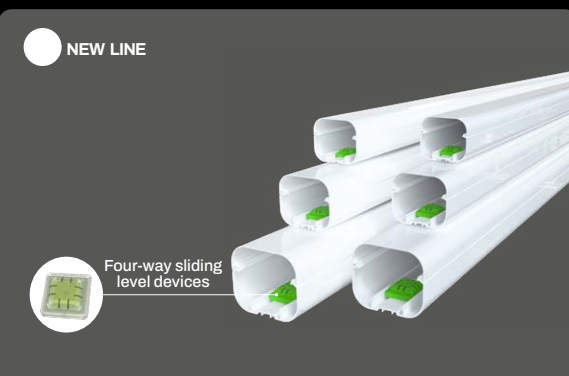

MODEL	MIN. QUANTITY	NEW LINE CODE	DIMENSIONS [in]	
			A	B
TB 72 - EXC	8 PCS = 629 7/8"	B-N11120072	2 7/8	2 1/2
TB 100 - EXC	5 PCS = 393 11/16"	B-N11120010	3 7/8	2 7/8

EXCELLENS TA

CORNER TERMINAL



NEW LINE TOP LINE ALMOND COLOR BROWN LINE

MODEL	NEW LINE CODE	TOP LINE CODE	BROWN LINE
TA 72 - EXC	N11122120	11122120	SCD100489
TA 100 - EXC	N11122130		

DIMENSIONS [in]					
MODEL	A	B	C	D	E
TA 72 - EXC	3 1/16	2 11/16	4 15/16	4 1/2	2 7/16
TA 100 - EXC	4 1/8	3 1/16	6 1/8	5 1/16	3 1/4

EXCELLENS TM

FLANGED SQUARE WALL TERMINAL



NEW LINE TOP LINE ALMOND COLOR BROWN LINE

MODEL	NEW LINE CODE	TOP LINE CODE	BROWN LINE
TM 72 - EXC	N11124172	11124172	SCD100487
TM 100 - EXC	N11124110		SCD100484

DIMENSIONS [in]					
MODEL	A	B	C	D	E
TM 72 - EXC	3 1/16	2 11/16	7 1/4	4 1/4	3 1/16
TM 100 - EXC	4 1/8	3 1/16	8 5/8	5 3/8	3 5/8

EXCELLENS CP

FLAT CURVE



NEW LINE TOP LINE ALMOND COLOR BROWN LINE

MODEL	NEW LINE CODE	TOP LINE CODE	BROWN LINE
CP 72 - EXC	N11120172	11120172	SCD100482
CP 100 - EXC	N11120100		

DIMENSIONS [in]			
MODEL	A	B	C
CP 72 - EXC	3 1/16	2 11/16	4 5/8
CP 100 - EXC	4 1/8	3 1/16	6

EXCELLENS CPS

ARTICULATED FLAT CURVE



NEW LINE TOP LINE ALMOND COLOR BROWN LINE


MODEL	NEW LINE CODE	TOP LINE CODE	BROWN LINE
CPS 72 - EXC	N11121110	11121110	SCD100485

DIMENSIONS [in]			
MODEL	A	B	C
CPS 72 - EXC	3 1/16	2 11/16	5 1/8

EXCELLENS KIT

MG, CP, TS AND TM

MADE IN ITALY




NEW LINE

CODE	DESCRIPTION
SCW100431	UNIVERSAL LINE SET COVER KIT BOX

EXCELLENS KIT

MG, CPS, TS, CSP AND TM

MADE IN ITALY



NEW LINE

CODE	DESCRIPTION
SCW100432	UNIVERSAL LINE SET COVER KIT BOX

EXCELLENS CA

CORNER CURVE

MADE IN ITALY



NEW LINE TOP LINE ALMOND COLOR BROWN LINE

MODEL	NEW LINE CODE	TOP LINE CODE	BROWN LINE
CA 72 - EXC	N11120272	11120272	SCD100494
CA 100 - EXC	N11120210		
DIMENSIONS [mm]			
MODEL	A	B	C
CA 72 - EXC	3 1/16	2 11/16	3 7/8
CA 100 - EXC	4 1/8	3 1/16	4 1/2

EXCELLENS CAS

ARTICULATED CORNER CURVE

MADE IN ITALY



NEW LINE TOP LINE ALMOND COLOR BROWN LINE

MODEL	NEW LINE CODE	TOP LINE CODE	BROWN LINE
CA 72 - EXC	N11123110	11123110	SCD100486
DIMENSIONS [mm]			
MODEL	A	B	C
CA 72 - EXC	3 1/16	2 11/16	4 3/4

EXCELLENS MG

COUPLING SLEEVE

MADE IN ITALY



NEW LINE TOP LINE ALMOND COLOR BROWN LINE

MODEL	NEW LINE CODE	TOP LINE CODE	BROWN LINE
MG 72 - EXC	N11121072	11121072	SCD100475
MG 100 - EXC	N11121100		
DIMENSIONS [mm]			
MODEL	A	B	C
MG 72 - EXC	3 1/16	2 11/16	2
MG 100 - EXC	4 1/8	3 1/16	2

EXCELLENS MF

FLEXIBLE SLEEVE

MADE IN ITALY




NEW LINE TOP LINE ALMOND COLOR

MODEL	NEW LINE CODE	TOP LINE CODE		
MF 72 - EXC	N11124500	11124500		
MF 100 - EXC	N11124505			
DIMENSIONS [mm]				
MODEL	A	B	C	D
MF 72 - EXC	2 7/8	2 1/2	20 1/2	16 1/2
MF 100 - EXC	3 7/8	2 7/8	20 1/2	16 1/2

BLOCK

PIPE STOP FOR EXCELLENS AND OPTIMA DUCT

MADE IN ITALY

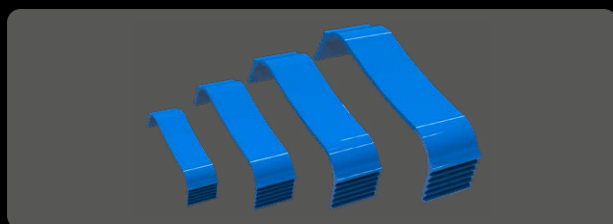

CODE	DESCRIPTION	MIN. QUANTITY
11125017	BLOCK T - 72	20
11125018	BLOCK - 100	20

SPIRIT XL 100 PLUS

BRACKET

MADE IN ITALY



- Made of PA6
- Anti-vibration sliding "NO-SHOCK" and spirit level supplied
- Fixing plugs
- Ready for fastening "Blue River" condensate drain pan

CODE	DESCRIPTION	LOAD CAPACITY [Lb]	DIMENSIONS [mm]		
			A	B	C
SCD500413	BRACKET "SPIRIT XL100 PLUS" WITH S/S SCREWS	2.2	16 15/16	5 1/8 ÷ 14 9/16	19 11/16



GALILEO SGL 140 ECO

WALL BRACKET WITH NOTCHED BAR

- Made of electro-galvanised metal sheet
- Includes spirit level
- External polyester painting RAL 9002
- Wall-mounted notched bar
- Ready for condensate drain pan
- Fixing plugs
- Adjustable rear swivel feet

MADE IN ITALY



CODE	DESCRIPTION	LOAD CAPACITY [Lb]	DIMENSIONS [in]			
			A	B	C	D
SCD500392	WALL BRACKET "GALILEO ECO SGL IVORY 140"	308.6	17 5/16 - 29 5/16	7 1/16 - 15 3/16	15 3/4	18 11/16



STANDARD TSE BRACKET

- Made of electro-galvanised metal sheet
- External polyester painting RAL 9002
- Ready for condensate drain pan
- "NO-SHOCK" sliding vibration dampers supplied
- Fixing plugs

MADE IN ITALY



CODE	DESCRIPTION	LOAD CAPACITY [Lb]	DIMENSIONS [in]			FIXING PLUGS
			A	B	C	
11100025	STANDARD BRACKET TSE-250	551.1	29 1/2	7 1/2 - 19 5/16	23 5/8	NOT INCLUDED




SPIRIT TELESCOPIC ADJUSTMENT BAR BRACKET SPIRIT

- Made of electro-galvanised metal sheet
- Includes spirit level
- Built-in handle
- Locking knobs
- Reusable after installation

MADE IN ITALY



CODE	DESCRIPTION
SCD500070	TELESCOPIC ADJUSTMENT BAR FOR BRACKETS "SPIRIT"

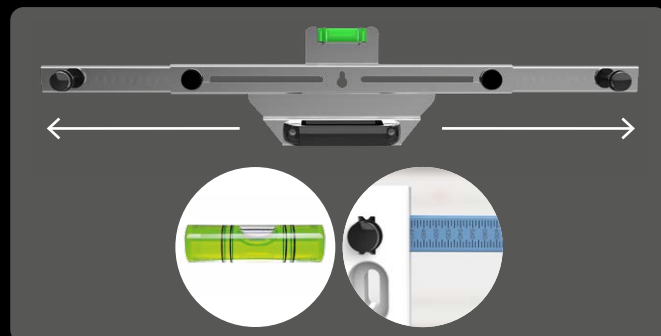

ZEUS HIGH ARTICULATED ANTI-VIBRATION FOOT IN VULCANIZED RUBBER SBR

- Anti-vibration device included
- Made of SBR recycled volcanic rubber
- Height adjustment ring nut min 7 7/8" max 10 1/16"
- Non-slip knurling adjustment
- Adjustable Joint
- No. 2 seats for spirit level insertion
- Fixing screw 1/32" x 2"
- Inclination 0-15°

MADE IN ITALY



DIMENSIONS [in]		
H	L	Ø
7 7/8 - 10	2 3/8	6 5/16

CODE	DESCRIPTION	MOD.	WEIGHT CAPACITY [Lb]
SCD500280	VULCANIZED RUBBER FLOOR SUPPORT - ADJUSTABLE AND ARTICULATED - "ZEUS" H.100 LONG (PACK OF 4 PCS)	LONG	1102.3



EXTREME 100 - 20

VULCANISED RUBBER VIBRATION-RESISTANT FLOOR BASE



DIMENSIONS [in]		
A	B	C
23 5/8	5 1/2	3 3/4

CODE	DESCRIPTION	LOAD CAPACITY [Lb]
SCD500242	SBR "EXTREME-20" 600 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT 1/32"	1102.3

KIT PLENUM EOLO

KIT PLENUM POLYSTYRENE EOLO, EOLO MINI UNIVERSAL WITH MANUAL ADJUSTMENT DAMPER

- Made of sintered expanded polystyrene
- With internal damper with external manual adjustment
- Thermal conductivity: 0.030 / 0.033 W/mK with respect to the EN 12667 / EN 12939 standard
- Resistance to vapour 40 / 70 μ in relation to EN 12086
- Reaction to fire class E according to EN- ISO - 11925 - 2
- Operating temperature: - 10°F / + 194°F
- Made of graphite-infused EPS material
- Water absorption % volume ≤ 5 in relation to EN 12087
- Reaction to fire class and according to EN 13501-1:2009
- Thermal performance thickness 1 3/16" 0.95 m2K/W
- Made of graphite-infused EPS material
- Collars integrated into plenum
- Total depth including collar 13 3/4"
- Machine fastening flange included


EOLO MINI

- Front collars 4 7/8" - 5 7/8" mm
- Side collars 7 7/8"

EOLO

- Front collars 5 7/8" - 7 7/8" mm
- Side collars 7 7/8"

CODE	DESCRIPTION
PWD401715	POLYSTYRENE PLENUM KIT EOLO MINI MOD.AM3 UNIVERSAL WITH MANUAL DAMPER
PWD401716	POLYSTYRENE PLENUM KIT EOLO MINI MOD.BM4 UNIVERSAL WITH MANUAL DAMPER
PWD401717	EOLO POLYSTYRENE PLENUM KIT MOD.E2 UNIVERSAL WITH MANUAL DAMPER
PWD401718	EOLO POLYSTYRENE PLENUM KIT MOD.A3 UNIVERSAL WITH MANUAL DAMPER
PWD401719	EOLO POLYSTYRENE PLENUM KIT MOD.B4 UNIVERSAL WITH MANUAL DAMPER
PWD401720	EOLO POLYSTYRENE PLENUM KIT MOD.C5 UNIVERSAL WITH MANUAL DAMPER

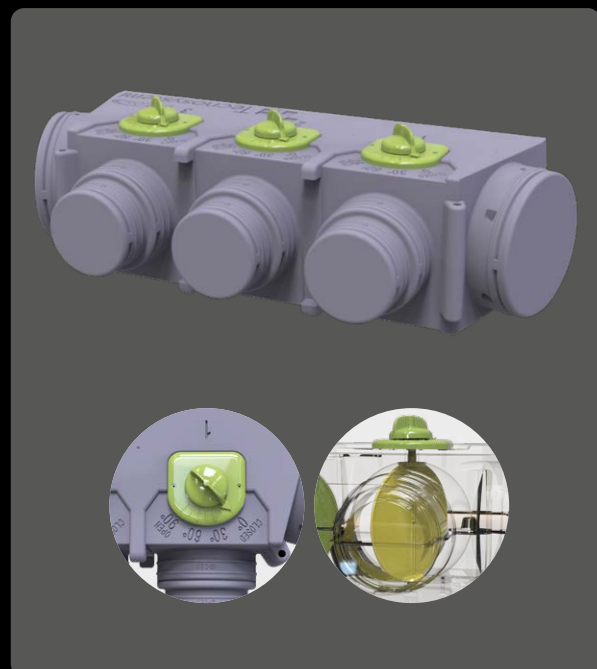

DIMENSIONS [in]								
CODE	A	B	C	D	E	No. Ø1/32	No. Ø1/16	No. Ø1/8
PWD401715	32 1/4	8 9/16	13 5/8	UP TO 23 5/8	UP TO 7 1/4	No.3 Ø4 7/8	No.3 Ø5 7/8	No.2 Ø7 7/8
PWD401716	39 11/16	8 9/16	13 5/8	UP TO 31 5/16	UP TO 7 1/4	No.4 Ø4 7/8	No.4 Ø5 7/8	No.2 Ø7 7/8
PWD401717	29 3/16	9 5/8	13 7/8	UP TO 21 5/8	UP TO 8 1/2	No.2 Ø5 7/8	No.2 Ø200	No.2 Ø7 7/8
PWD401718	39 3/8	10 3/8	13 7/8	UP TO 31 1/2	UP TO 8 1/2	No.3 Ø5 7/8	No.3 Ø7 7/8	No.2 Ø7 7/8
PWD401719	49 5/8	11 1/8	13 7/8	UP TO 41 3/4	UP TO 9 1/4	No.4 Ø5 7/8	No.4 Ø7 7/8	No.2 Ø7 7/8
PWD401720	59 7/8	12	13 7/8	UP TO 51 3/16	UP TO 9 5/8	No.5 Ø5 7/8	No.5 Ø7 7/8	No.2 Ø7 7/8